

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

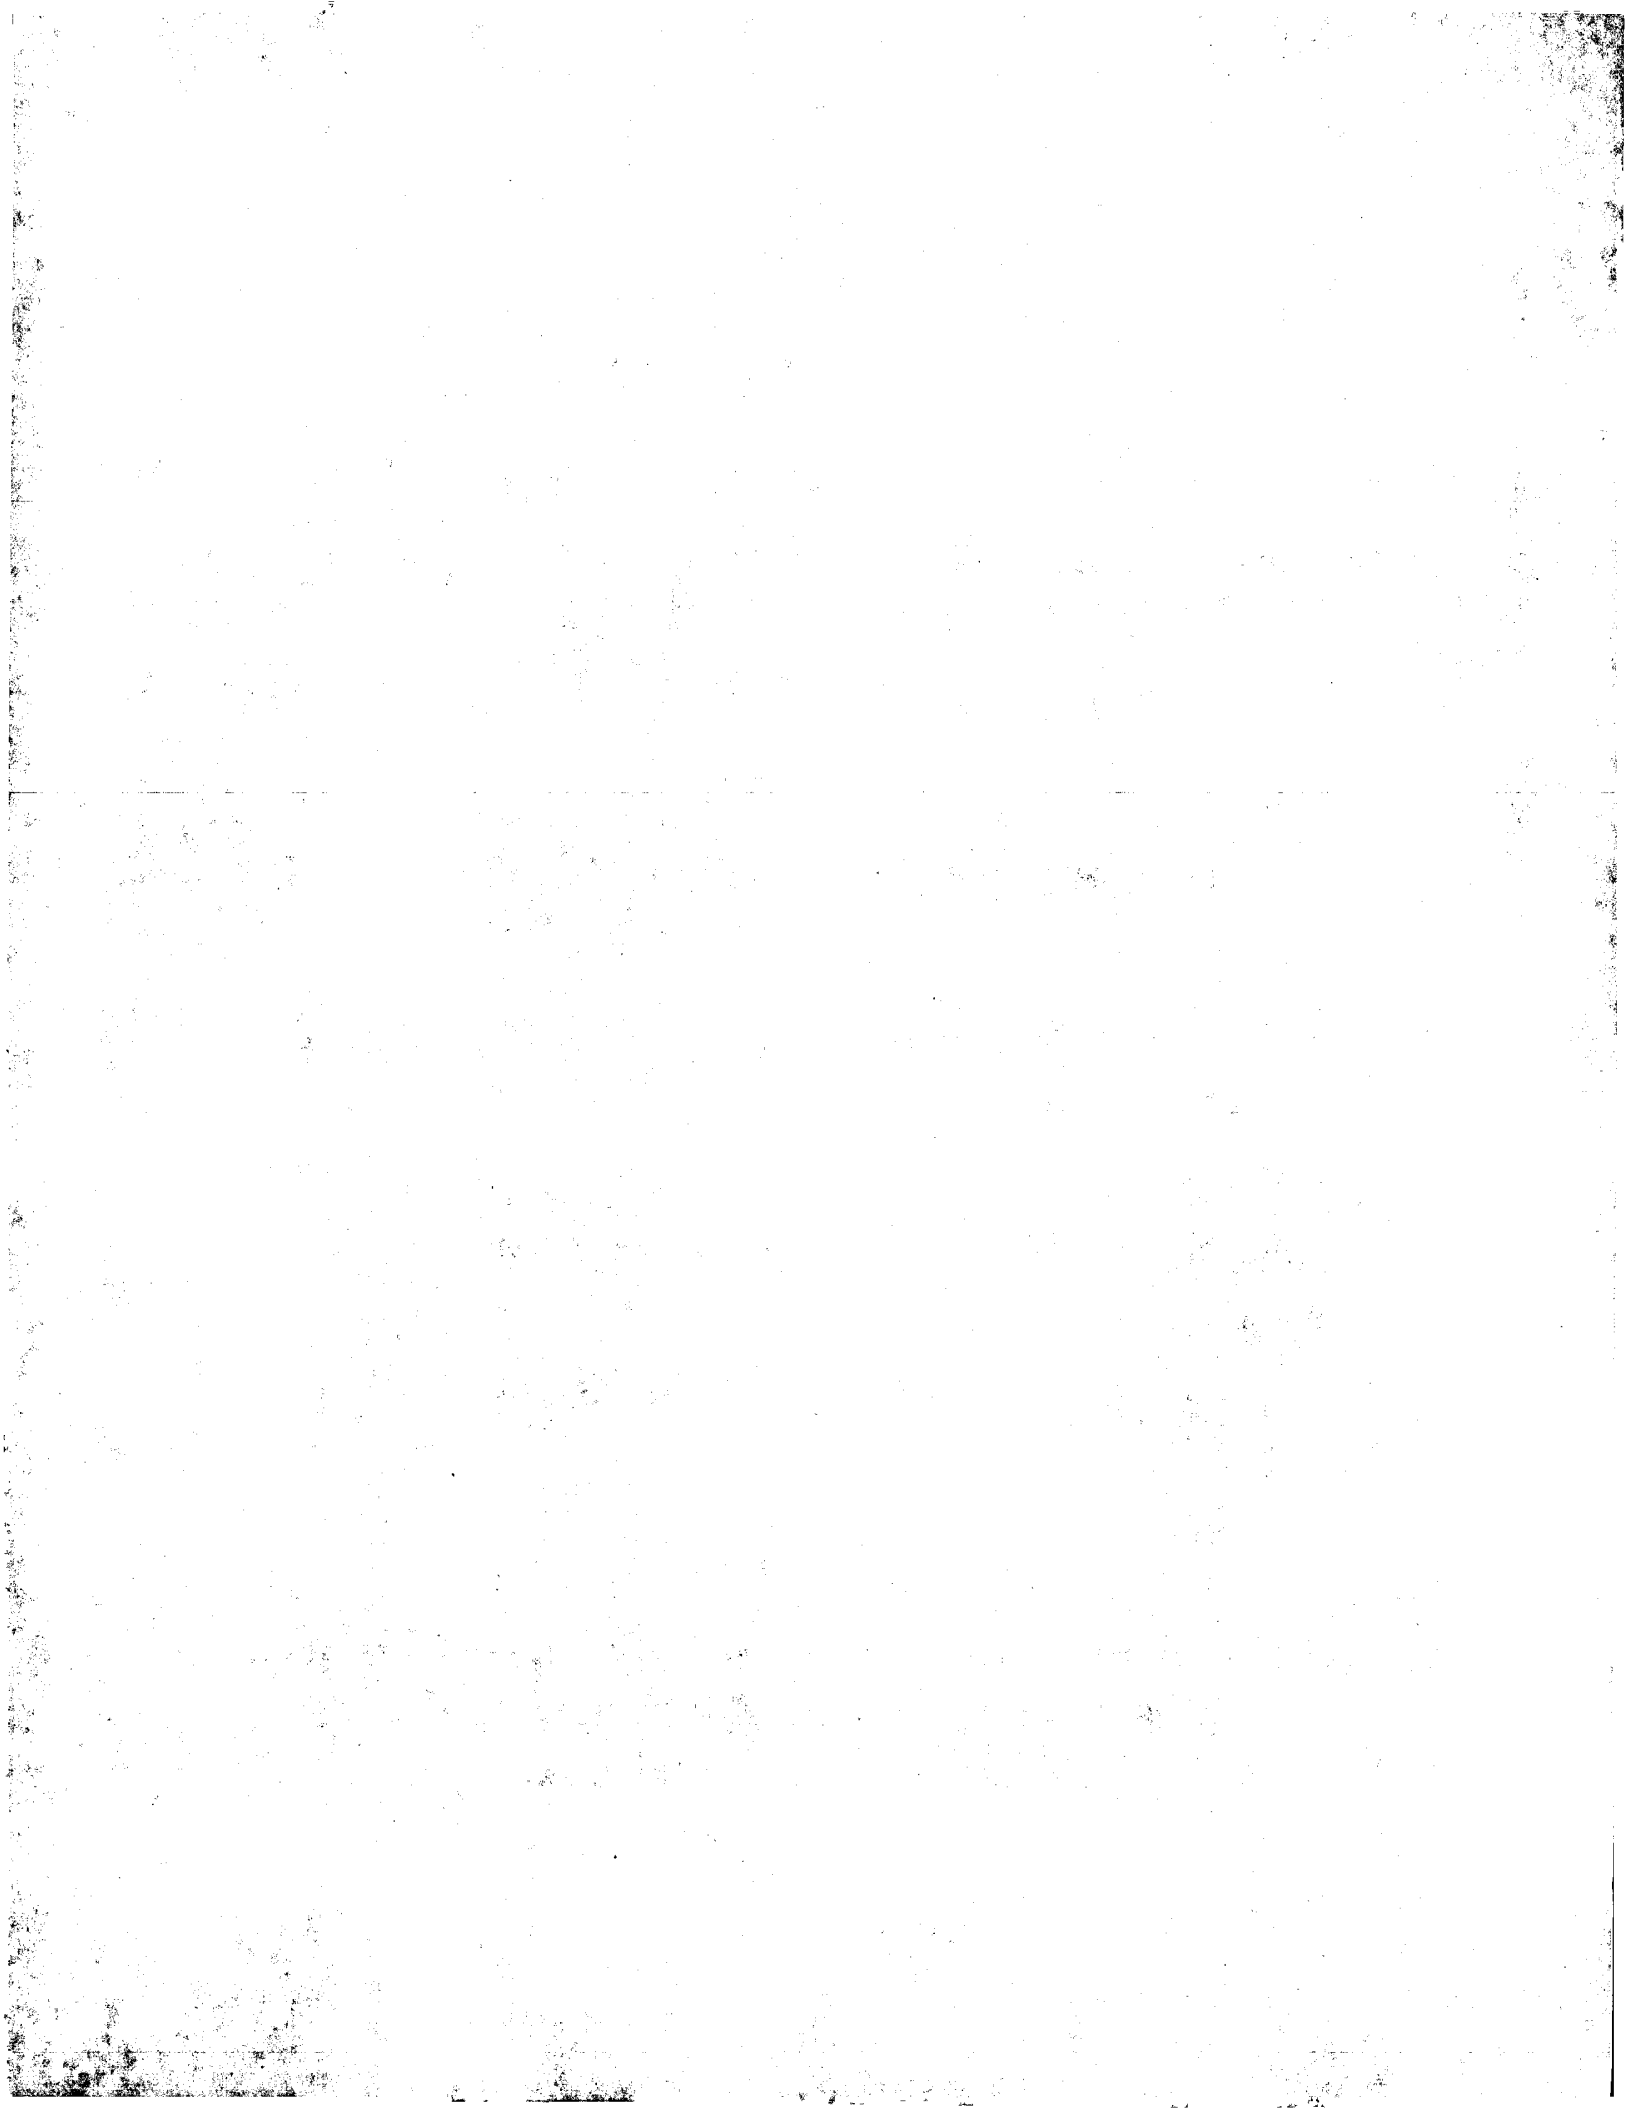

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

(Case No. 03-975)

In the Application of:

Keene

Serial No.: 10/706,593

Confirmation No.: 7825

Filed: November 12, 2003

Title: Ferromagnetic Object Detector



Art Unit: 2862

Examiner: Not Assigned

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

TRANSMITTAL LETTER

In regard to the above identified application:

1. We are transmitting herewith the attached:


- A. Transmittal of Certified Copy
- B. Certified Copy of Priority Document
- C. Return receipt Postcard


2. With respect to additional fees:

- ☒ A. No additional fee is required.
- B. Attached is a check in the amount of \$

3. Please charge any additional fees or credit overpayment to Deposit Account No. 13-2490.
A duplicate copy of this sheet is enclosed.

4. CERTIFICATE OF MAILING UNDER 37 CFR § 1.8: The undersigned hereby certifies that this Transmittal Letter and the paper, as described in paragraph 1 hereinabove, are being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on this 8th day of March, 2004.

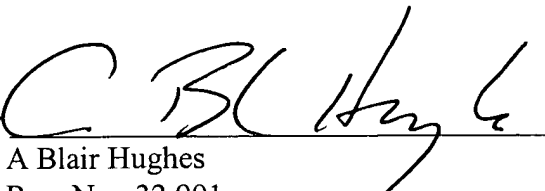By 
A Blair Hughes
Reg. No. 32,901

McDONNELL BOEHNNEN HULBERT
& BERGHOFF 
300 South Wacker Drive, Suite 3200
Chicago, Illinois 60606



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
(Case No. 03-975)

In the Application of:)	
)	
Keene)	
)	Art Unit: 2862
Serial No.: 10/706,593)	
)	
Confirmation No.: 7825)	Examiner: Not Assigned
)	
Filed: November 12, 2003)	
)	
Title: Ferromagnetic Object Detector)	

TRANSMITTAL OF CERTIFIED COPY

Attached please find the certified copy of the foreign application from which priority is claimed for this case:


Country: Great Britain
Application Number: 0226334.1
Filing Date: November 12, 2002

Respectfully submitted,

**McDONNELL BOEHNEN
HULBERT & BERGHOFF**

Dated: March 8, 2004

By:

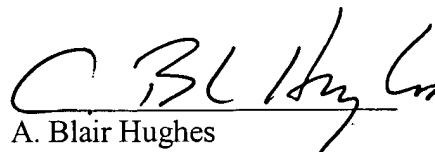
A. Blair Hughes
Reg. No. 32,901



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

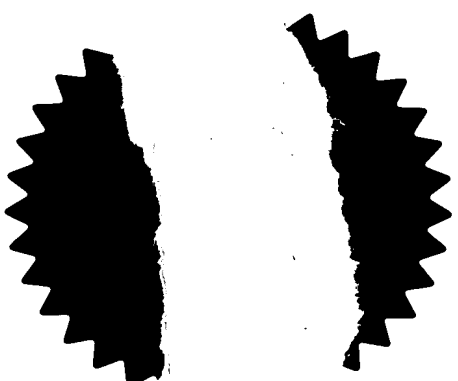

Signed

Dated 26 November 2003

Patents Form 1/77

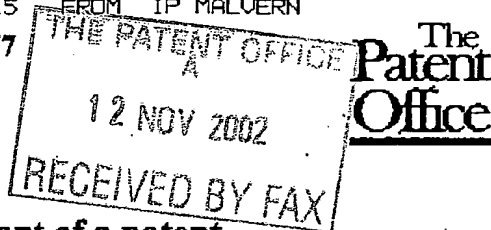Patents Act 1977
(Rule 16)

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

[EFFECTIVE COPY]

1. Your reference

IP/P7181

12NOV02 E762801-1 D02776

2. Patent application number

(The Patent Office will fill in this part)

0226334.1

12NOV02 0.00-0226334.1

12 NOV 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

QINETIQ LIMITED

Registered Office 85 Buckingham Gate
London SW1E 6PD
United Kingdom

8183873008

GB

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

FERROMAGNETIC OBJECT DETECTOR

5. Name of your agent (if you have one)

PHILIP DAVIES 'et al'

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

QINETIQ LIMITED
IP Formalities
A4 Bldg
Cody Technology Park
Ively Road
Farnborough
Hants GU14 0LX United Kingdom

Patents ADP number (if you know it)

8183873005

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number or earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

YES (b)

Patents Form 1/77

Patents Form 1/77

0052389 12-Nov-02 02:22

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form 0

Description 16

Claim(s) 3

Abstract 1

Drawing(s) 5

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 2 /


Request for preliminary examination and search (Patents Form 9/77) 1 /

Request for substantive examination (Patents Form 10/77) 0

Any other documents (please specify) 0

11. I / We request the grant of a patent on the basis of this application.

Signature


Philip Davies

Date
12.11.02

12. Name and daytime telephone number of person to contact in the United Kingdom Linda Bruckshaw 01252 392722

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent of the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have attached 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

- 1 -

DUPLICATE

FERROMAGNETIC OBJECT DETECTOR

The present invention relates to an apparatus for detecting ferromagnetic objects and in particular to a device for detecting the presence of ferromagnetic objects in the vicinity of magnetic resonance imaging (MRI) scanners.

Most major hospitals have rooms for Magnetic Resonance Imaging (MRI) scanners. These scanners have a large magnet that is usually superconducting and produces a very high magnetic field up to several Tesla within the bore of the MRI scanner. The magnetic field strength outside of the magnet falls rapidly with distance creating very large magnetic field gradients in the surrounding room. Any ferromagnetic metal object in the vicinity of the magnet will experience a force attracting it towards the magnet. The force exerted by the magnet may be sufficiently strong to accelerate an unrestrained ferromagnetic object towards the MRI scanner, where it will come to rest in or near to the bore of the MRI scanner. This is called the projectile effect or missile effect and it can be very dangerous and damaging.

Large ferromagnetic metal objects undergoing the projectile effect can enter the bore of the MRI scanner with sufficient kinetic energy to injure a patient or damage the MRI machine extensively. Furthermore, such objects may be impossible to remove from the bore without switching the magnetic field off. It can take over a week to restore the field and the down-time can be expensive for the hospital.

Examples of problem ferromagnetic objects that cause projectile effect accidents include gas bottles (small and large), wheelchairs, tool boxes, mop buckets, vacuum cleaners, pens, scissors and various medical devices, for example defibrillators and respirators.

Because of these dangers a strict screening procedure is enforced that is usually adequate in ensuring that staff and patients are free of ferromagnetic metal objects before entering the room in which the MRI scanner is located. However, there are a few major instances of projectile effects in the world every year and many minor incidents. Each major incident is usually very costly to the hospital or their insurers.

- 2 -

Metals that are non-ferrous do not present this danger and are used routinely in MRI rooms. Metal items for use in MRI rooms are usually pre-approved. However, it is often difficult for people to know if a metal is ferrous or non-ferrous and it is not
5 always convenient to check for approved items. Accordingly, there is always a danger of the projectile effect due to oversights and mistakes on part of staff and patients, and general human error.

10 Installing metal detectors at the entrance to hospital rooms in which MRI scanners are located might help reduce the incidence of MRI related accidents (The New England Journal of Medicine 2001; 345; pp 1000-1001). For example, it has been suggested that an archway metal detector, similar to those employed at airports, could be placed at the entrance to an MRI room to detect metal objects which might pose a danger.

15 However, there are several difficulties with the above suggestion which have hitherto precluded the use of conventional metal detectors for screening persons in the vicinity of an MRI scanner.

20 Firstly, the metal detector would have to reliably discriminate between ferromagnetic and non-ferromagnetic metals otherwise it would alarm on approved metal objects. Not all conventional archway metal detectors are capable of such discrimination.

25 Discriminating metal detectors are available, however such devices tend to transmit relatively large amounts of electromagnetic energy. This is not desirable in a clinical environment where sensitive equipment abounds.

Moreover, conventional archway metal detectors are primarily aimed at security applications rather than safety applications and typically exhibit a high degree of sophistication (see for example U.S. Patent 3,971,983). Consequently, sophisticated
30 archway metal detectors are prohibitively expensive for use in MRI screening applications.

Furthermore, conventional archway metal detectors are physically incompatible with the beds, trolleys and wheelchairs used in a hospital environment (see for example
35 U.S. Patent 6,133,829).

- 3 -

Finally, conventional metal detection systems aimed at security applications are almost exclusively attended by an operator who will take appropriate action in response to a visual or audible signal from the metal detection system. In contrast, a
5 screening device for an MRI scanner must operate automatically to provide an audible / visual warning of a potential danger, and even prohibit access to the MRI scanner if appropriate.

10 It is an object of the present invention to mitigate at least some of the disadvantages of the foregoing metal detection systems. It is a further object of the present invention to provide an alternative device for detecting ferromagnetic objects in the vicinity of an MRI scanner.

- 4 -

According to a first aspect of the present invention, there is now proposed an apparatus for detecting a ferromagnetic object comprising

primary sensor means adapted to measure a magnetic field and to produce a
5 corresponding measurement signal,

secondary, non-magnetic, sensor means adapted to detect the movement of objects
in the vicinity of the primary sensor means, and

10 signal processing means arranged in communication with the primary and secondary
sensor means,

wherein the signal processing means is configured to identify temporal variations in
the measurement signal due to the movement of a ferromagnetic object within an
15 ambient magnetic field and to correlate the identified temporal variations in the
measurement signal with movement of objects detected by the secondary, non-
magnetic sensor means, and to provide an output indicative of the presence of a
ferromagnetic object in the vicinity of the primary sensor means only in the presence
of a correlation there-between.

20

The above mentioned apparatus is advantageous in that ferromagnetic objects can
be reliably detected using a combination of the primary and secondary sensor means.
False alarms due to interference from non-hazardous ferromagnetic objects moving
within the extended zone of sensitivity of the apparatus are reduced by the
25 combination of the primary and secondary sensor means.

The apparatus is optimised to merely detect the presence of a ferromagnetic object in
the vicinity of the primary sensor means rather than to indicate the exact location of a
ferromagnetic object. The capability to merely detect the presence of a ferromagnetic
30 object is sufficient since the apparatus is primarily intended to detect ferromagnetic
objects inadvertently brought into the vicinity of the primary sensor means rather than
deliberately concealed therefrom.

- 5 -

In the interest of clarity, it should be noted that the ambient magnetic field referred to above may comprise several components, for example arising from the earth's magnetic field, any localised magnetic fields generated by magnetic or electromagnetic equipment, and local perturbations in the above magnetic field(s) due to static ferromagnetic objects located therein. In the absence of extraneous interference (caused, for example, by the movement of ferromagnetic objects), it is assumed that the ambient magnetic field is substantially static and has substantially constant field strength.

10 Preferably, the secondary, non-magnetic sensor means comprises at least one of a photo-electric sensor, a fibre-optic sensor, a passive infrared sensor, a camera, a thermal imager, an ultrasonic sensor, a radar sensor, an electrostatic sensor, a millimetre wave sensor and a pressure sensitive mat.

15 In a preferred embodiment the apparatus further comprises at least one of an audible warning device, a visual warning device and means for preventing access to a prohibited area, operable by the output from the signal processing means.

The audible and visual warning devices provide the advantage that an immediate and direct warning is provided of the presence of a ferromagnetic object. The output from the apparatus does not require analysis by a skilled operator as would be the case for a conventional security ferrous metal detector.

20 The means for preventing access provides an additional benefit should the audible and visual warning devices be ignored.

Advantageously, the means for preventing access comprises at least one of a locking device and a barrier device.

30 In a further preferred embodiment, the signal processing means comprises filter means arranged to substantially reject spurious variations in the measured magnetic field.

Conveniently, the filter means comprises a high-pass filter.

35

- 6 -

Advantageously, the high-pass filter is responsive to the measurement signal produced by the primary sensor means to attenuate variations therein having a frequency of less than 0.3 Hz.

- 5 Preferably, the filter means comprises a low-pass filter.

Advantageously, the low-pass filter is responsive to the measurement signal produced by the primary sensor means to attenuate variations therein having a frequency of greater than 3 Hz.

10

Preferably, the signal processing means comprises means for comparing the amplitude of the output from the filter means with an adjustable threshold level so as to indicate temporal variations in the measurement signal due to the movement of a ferromagnetic object within an ambient magnetic field.

15

The means for comparing the amplitude of the output from the filter means with an adjustable threshold level is advantageous in that the sensitivity of the apparatus may be adjusted depending on the size and magnetic signature of the ferromagnetic object to be detected and the level of background interference.

20

In a preferred embodiment, the primary sensor means has a first magnetic sensor comprising one of a fluxgate sensor, a magneto-resistive sensor, a magneto-impedance sensor, a hall-effect sensor, and a galvanic coil sensor. Additionally, the primary sensor means may have a second magnetic sensor comprising one of a
25 fluxgate sensor, a magneto-resistive sensor, a magneto-impedance sensor, a hall-effect sensor, and a galvanic coil sensor.

The apparatus is optimised to detect a ferromagnetic object using a localised primary sensor means. It is assumed that a ferromagnetic object to be detected will pass
30 through a given volume of space. Accordingly, the zone of sensitivity of the primary sensor means and the positioning of the primary sensor means in use, are optimised to detect ferromagnetic objects within the above mentioned given volume of space.

- 7 -

For example, where the apparatus is used to detect ferromagnetic objects at the entrance to a magnetic resonance imaging scanner, it may be assumed that any ferromagnetic objects will be carried or transported at about waist height. The primary sensor means would therefore be located at approximately waist height and be arranged to detect ferromagnetic objects across the entire width of the entrance. In this example, the entrance to the scanner provides a physical restriction which ensures that anyone entering or leaving the MRI suite (the room in which the magnetic resonance imaging scanner is located) will pass through the zone of sensitivity of the primary sensor means. In this example, the apparatus is aimed primarily at a safety application, namely to detect ferromagnetic objects being inadvertently carried near the magnetic resonance imager, rather than to detect the deliberate concealment of a ferromagnetic object (security applications). Accordingly, an archway style ferrous metal detector, as used in security applications, is not required.

Conveniently, at least one of the first and second magnetic sensors is separable from the signal processing means such that, in use, the at least one separable sensor may be disposed remotely to the signal processing means.

In use, the primary sensor means may be arranged to detect ferromagnetic objects in the vicinity of a magnetic resonance imaging scanner.

According to a second aspect of the present invention, there is now proposed a magnetic resonance imaging scanner comprising an apparatus for detecting ferromagnetic objects according to the first aspect of the present invention.

According to a third aspect of the present invention, a method for detecting a ferromagnetic object comprises the steps of

- (i) measuring a magnetic field using primary sensor means and producing a corresponding measurement signal,
- (ii) detecting the movement of objects in the vicinity of the primary sensor means using secondary, non-magnetic, sensor means,

- 8 -

(iii) identifying temporal variations in the measurement signal produced by the primary sensor means due to the movement of a ferromagnetic object within an ambient magnetic field,

5 (iv) assessing said identified temporal variations in the measurement signal in conjunction with movement of objects detected by the secondary, non-magnetic sensor means to determine a correlation there-between, and

10 (v) in the occurrence of a correlation, providing an indication of the presence of a ferromagnetic object.

The foregoing aspects of the present invention utilise secondary, non-magnetic, sensor means to detect the movement of objects in the vicinity of the primary sensor means. Alternatively, the secondary, non-magnetic, sensor means may be omitted
15 from the apparatus, however susceptibility to false alarms may be increased.

Therefore, according to another aspect of the present invention, there is now proposed an apparatus for detecting a ferromagnetic object comprising primary sensor means adapted to measure a magnetic field and to produce a corresponding
20 measurement signal, arranged in communication with signal processing means configured to identify temporal variations in the measurement signal due to the movement of a ferromagnetic object within an ambient magnetic field and to provide an output indicative of the presence of a ferromagnetic object in the vicinity of the primary sensor means.

- 9 -

The invention will now be described, by example only, with reference to the accompanying drawings in which;

Figure 1 shows a schematic representation of the ferromagnetic object detector
5 according to the present invention.

Figure 2 illustrates an alternative embodiment of the present invention having a second magnetic sensor,

10 Figure 3 shows a schematic representation of the ferromagnetic object detector according to the present invention having a complementary, non-magnetic, sensor,

Figure 4 illustrates an alternative arrangement of the ferromagnetic object detector shown in figure 3 incorporating a second magnetic sensor, and

15

Figure 5 illustrates a typical installation of a ferromagnetic object detector according to the present invention installed at the entrance to a room in which an MRI scanner is located.

- 10 -

Referring to figure 1, the ferromagnetic object detector (2) according to the present invention comprises a magnetic sensor (4), such as a fluxgate sensor, a magneto-resistive sensor, a magneto-impedance sensor, a hall-effect sensor, or a galvanic coil sensor, that outputs a signal that is a measurement of the magnetic field incident upon the sensor (4). Since the ferromagnetic object detector (2) will invariably be installed in a fixed position, for most of the time the sensor (4) will register a largely unchanging ambient magnetic field due to the earth. This constitutes a large offset on the output of the sensor. The signal due to the ambient field can be removed using a high pass filter. Furthermore, in a hospital environment, for example, there is a lot of ambient magnetic noise particularly at the power supply frequency and its harmonics. These frequencies are above those of interest so they may be removed with a low pass filter. The filters collectively constitute a band-pass filter (6) to perform these functions.

The time for a person to pass a location is typically within the range 0.3 to 3 seconds. The reciprocal of these times are the frequencies of interest, approximately 0.3 to 3 Hz. This is the passband of interest. Because the main D.C. field of the earth and the higher frequencies of the ambient magnetic noise are removed, the remaining signal is small and is amplified, by an amplifier (8), to a convenient level.

If a ferromagnetic object passes close to the sensor (4), the ambient magnetic field will be altered causing a change in the output of the sensor (4). That change will pass the filter (6) and be amplified by the amplifier (8). In order to trigger an alarm the signal size is compared to a pre-set threshold. Because the signal may be positive or negative, the threshold detector consists of a rectification stage (10) followed by a comparator (12) that has a circuit (14) to provide a threshold voltage. Alternatively, separate comparators are used for positive and negative signals with the outputs combined to give a single alarm signal instead of a rectifier (10) and a single comparator (12). The output of the comparator (12) may be arranged to have logic level 'zero' for the state where the signal does not exceed the threshold, and logic level 'one' for the state when the signal has exceeded the threshold.

It should be noted that the output of the comparator (12) will return to logic level 'zero' when the ferromagnetic object has passed the sensor and its signal has dropped below the threshold. In practice, the ALARMED state needs to be maintained until a

- 11 -

reset signal is provided (for example by pressing a reset button). A digital latch (16) is used to maintain an ALARMED state after the ferromagnetic object has passed the magnetic sensor (4). The latch (16) consists of a simple reset-set flip-flop (RS flip-flop). Alternatively, other methods may be used to latch the output of the comparator
5 (12). Once the reset button (18) is pressed the output of the latch (16) returns to the NOT ALARMED state.

The digital latch (16) is used to trigger one or more warning devices such as an audible alarm (20) and a visual alarm (22). Depending on the circumstances it may be
10 appropriate to have one of these alarms. All of these functions may be constructed in a single unit to be mounted on a wall or on a stand that is fixed to the floor as appropriate. The unit incorporates outputs to activate external components, for example remote audible and visual alarm devices (24) that are mounted above the door to a MRI room so the person can see the visual alarm (24) directly in front of
15 them although the sensor unit would be by their side.

In addition, connections are available for activating access control devices such as electronic door locks (26) or barriers (28), so physical prevention may be invoked.

20 In an alternative embodiment of the present invention, the magnetic sensor (4) is separate from the main (master) unit but connected to it by wires. In this embodiment of the present invention, the master unit is identical to that shown in figure 1, except in that the magnetic sensor (4) of figure 1 is removed and is mounted separately and connected to the master unit by a cable. This allows the main unit to be located in a
25 convenient place; not necessarily adjacent to the thoroughfare before the room in which the MRI scanner is located.

For rooms where wide or double doors are used, the sensing range of this device may be insufficient to cover the whole area of the thoroughfare adequately. In this
30 case a second sensor is required that is placed on the opposite side of the thoroughfare so each sensor needs to only cover half of the width of the thoroughfare.

Referring to Figure 2, one way of achieving the above is to use a master unit (30) and a slave unit (32) that are mounted respectively either side of the thoroughfare. The
35 master unit (30) is identical to that of figure 1 with the exception of an additional input

- 12 -

(34) and a digital OR gate (36). The slave unit (32) comprises a slave magnetic sensor (44) which outputs a signal that is a measurement of the magnetic field incident upon the sensor (44). The output from the slave magnetic sensor (44) is filtered by a band pass filter (46) and amplified by a slave amplifier (48) before being
5 compared with a preset threshold level. As with the master unit (30), the threshold detector consists of a rectification stage (50) followed by a comparator (52) that has a circuit (54) to provide a threshold voltage. Alternatively, separate comparators are used for positive and negative signals with the outputs combined to give a single alarm signal instead of a rectifier (50) and a single comparator (52).

10

The output from the slave comparator (52) is communicated to the master unit (30). A cable connects the output of the slave unit (32) to the input (34) of the master unit (30). The OR gate (36) ensures that the ALARMED state activates when either or both of the master and slave comparators (12, 52) pass to logic level one.

15

There are several other possible configurations such as locating the two complete electronics channels of figure 2 in one single unit with one or both magnetic sensors (4, 44) arranged external to the unit and connected by leads to the unit.

20 The split of the second sensor channel between the master and slave units (30, 32) can be made at any point e.g. after the filter (46), or the amplifier (48), or the rectifier (50) or after the comparator (52) as illustrated in figure 2.

It is, however, beneficial from the point of view of minimising interference pickup that
25 the digital signal is passed as shown in figure 2. With any of these embodiments of the present invention the magnetic sensors (4, 44) may be external to the units (30, 32) and connected to them by cables.

Where the analogue signals from the two channels, i.e. before the comparators (12, 52), are together in the master unit, they may be combined in an opposite polarity so
30 that noise that is common to both sensors (4, 44) is cancelled. In this embodiment only one rectifier and comparator are needed.

- 13 -

Whilst effective at detecting ferromagnetic objects, the foregoing embodiments of the present invention may be prone to false alarms. One of the problems with magnetic sensors is that they are omni-directional and they will sense changes in field due to sources outside of the region of interest. Examples may include traffic, filing cabinets
5 being opened, passing trolleys etc. Hospitals have environments where this is particularly frequent and unavoidable so a magnetic sensor would give rise to many false alarms.

Referring to figure 3, to reduce the false alarms, the magnetic sensor (4) is used in
10 conjunction with a complementary, non-magnetic, sensor (60) that senses when a person is passing the magnetic sensor (4). The non-magnetic sensor (60) comprises a photo-electric sensor arranged to detect a person passing through a beam of light. Alternatively, the photo-electric sensor comprises a retro-reflective sensor, a diffuse scan sensor, a fibre-optic sensor or a contrast type optical sensor. The photo-electric
15 sensor is positioned to indicate when a person is actually passing into the room to be protected. The system will only produce an alarm if there is coincidence between the magnetic sensor (4) and the non-magnetic sensor (60), i.e. something is breaking the light beam AND the magnetic signal is above the predetermined threshold level. This is achieved by passing the output from the comparator (12) and the output from the
20 non-magnetic sensor (60) into a logic AND gate (62).

This does leave a false alarm condition when a magnetically clean person is passing into the room simultaneously with an independently caused magnetic signal from elsewhere. However, these occurrences will be rare compared to those if the photo-
25 electric sensor was not used.

In alternative embodiments of the present invention, the non-magnetic sensor (60) comprises any sensor capable of detecting a person moving past the magnetic sensor (4). For example the non-magnetic sensor (60) may comprise a camera, a
30 thermal imager, a passive infrared sensor (PIR), an ultrasonic sensor, a radar sensor (electromagnetic or ultrasonic), an electrostatic sensor, a millimetre wave sensor or a pressure sensitive mat.

- 14 -

As with some of the embodiments of the invention described previously, the magnetic sensor (4) and the non-magnetic sensor (60) may be arranged separately from the main (master) unit but connected to it. In this embodiment of the present invention, the master unit is identical to that shown in figure 3, except in that the magnetic sensor (4) and the non-magnetic sensor (60) of figure 3 is removed and is mounted separately and connected to the master unit by a cable. Similarly, the non-magnetic sensor (60) is mounted separately from the master unit. This allows the main unit to be located in a convenient place; not necessarily adjacent to the thoroughfare before the room in which the MRI scanner is located.

10

As discussed previously, for rooms where wide or double doors are used, the sensing range of the embodiment of the present invention shown in figure 3 may be insufficient to cover the whole area of the thoroughfare adequately. In this case a second magnetic sensor is required that is placed on the opposite side of the thoroughfare so each sensor needs to only cover half of the width of the thoroughfare.

15

A similar arrangement to that shown in figure 2 and discussed above may be used with the embodiments of the present invention incorporating a complementary non-magnetic sensor (60).

20

Referring to Figure 4, a master unit (30) and a slave unit (32) are mounted respectively either side of the thoroughfare. The master unit (30) is identical to that of figure 3 with the exception of an additional input (64) and a digital OR gate (66). The slave unit (32) comprises a slave magnetic sensor (44) which outputs a signal that is a measurement of the magnetic field incident upon the sensor (44). The output from the slave magnetic sensor (44) is filtered by a band pass filter (46) and amplified by a slave amplifier (48) before being compared with a preset threshold level. As with the master unit (30), the threshold detector consists of a rectification stage (50) followed by a comparator (52) that has a circuit (54) to provide a threshold voltage. Alternatively, separate comparators are used for positive and negative signals with the outputs combined to give a single alarm signal instead of a rectifier (50) and a single comparator (52).

25

30

- 15 -

The output from the slave comparator (52) is communicated to the master unit (30). A cable connects the output of the slave unit (32) to the input (64) of the master unit (30). The AND gate (62) operates in conjunction with the OR gate (66) to ensure that the ALARMED state activates when the output from the non-magnetic sensor (60) AND either or both of the master and slave comparators (12, 52) pass to logic level one.

As with the embodiment shown in figure 2, there are several other possible configurations such as locating the two complete electronics channels of figure 4 in one single unit with one or both magnetic sensors (4, 44) arranged external to the unit and connected by leads to the unit.

The split of the second sensor channel between the master and slave units (30, 32) can be made at any point e.g. before the filter (46), after the filter (46), after the amplifier (48), after the rectifier (50), or after the comparator (52) as illustrated in figure 4.

It is, however, beneficial from the point of view of minimising interference pickup that the digital signal is passed as shown in figure 4. With any of these embodiments of the present invention the magnetic sensors (4, 44) may be external to the units (30, 32) and connected to them by cables.

Where the analogue signals from the two channels, i.e. before the comparators (12, 52), or before the filters (4, 46), are combined together in the master unit, they may be combined in an opposite polarity so that noise that is common to both sensors (4, 44) is cancelled. In this embodiment only one rectifier and comparator are needed.

Figure 5 illustrates how the embodiments of the invention shown in figures 2 and 4 may be installed in a situation where the entrance to an MRI room is at the end of a corridor.

Referring to figure 5, the master and slave units (30, 32) are located either side of the thoroughfare at waist height above the floor because that is the most likely height at which a ferromagnetic material may be inadvertently carried. The master and slave

- 16 -

units (30, 32) are also positioned about one metre before the door. An automatic door lock (70) and a visual warning device (24) are also shown in Figure 5.

- Where the MRI room entrance is located in the side of a corridor it is not practical to
- 5 mount the sensors one metre before the door. In this case the units are mounted on the walls either side of the door. It may not be practical in this case to use an automatic door lock because the door may have been opened before it can be activated. It is important that a clear warning is given in this case.
- 10 Where the MRI room entrance is located off a lobby area or a larger room the units could be mounted on stands fixed to the floor a short distance to the door or less preferably on the walls either side as described above.

- In some situations it may be deemed that an audible alarm is sufficient and no
- 15 external warning devices are necessary. One example of this is where the device is not installed on the entrance of a MRI room but at the exit of the preparatory area as a final check after the normal screening procedures.

- 17 -

Claims

1. An apparatus for detecting a ferromagnetic object comprising
 - 5 primary sensor means adapted to measure a magnetic field and to produce a corresponding measurement signal,
 - secondary, non-magnetic, sensor means adapted to detect the movement of objects in the vicinity of the primary sensor means, and
 - 10 signal processing means arranged in communication with the primary and secondary sensor means,wherein the signal processing means is configured to identify temporal variations in
 - 15 the measurement signal due to the movement of a ferromagnetic object within an ambient magnetic field and to correlate the identified temporal variations in the measurement signal with movement of objects detected by the secondary, non-magnetic sensor means, and to provide an output indicative of the presence of a ferromagnetic object in the vicinity of the primary sensor means only in the presence
 - 20 of a correlation there-between.
2. An apparatus according to claim 1 wherein the secondary, non-magnetic sensor means comprises at least one of a photo-electric sensor, a fibre-optic sensor, a passive infrared sensor, a camera, a thermal imager, an ultrasonic sensor, a radar
 - 25 sensor, an electrostatic sensor, a millimetre wave sensor and a pressure sensitive mat.
3. An apparatus according to claim 1 or 2 further comprising at least one of an audible warning device, a visual warning device and means for preventing access to
 - 30 a prohibited area, operable by the output from the signal processing means.
4. An apparatus according to 3 wherein the means for preventing access comprises at least one of a locking device and a barrier device.

- 18 -

5. An apparatus according to any of the preceding claims wherein the signal processing means comprises filter means arranged to substantially reject spurious variations in the measured magnetic field.
- 5 6. An apparatus according to claim 5 wherein the filter means comprises a high-pass filter.
7. An apparatus according to claim 6 wherein the high-pass filter is responsive to the measurement signal produced by the primary sensor means to attenuate variations
10 therein having a frequency of less than 0.3 Hz.
8. An apparatus according to any of claims 5 – 7 wherein the filter means comprises a low-pass filter.
- 15 9. An apparatus according to claim 8 wherein the low-pass filter is responsive to the measurement signal produced by the primary sensor means to attenuate variations therein having a frequency of greater than 3 Hz.
10. An apparatus according to any of claims 5 – 9 wherein the signal processing
20 means comprises means for comparing the amplitude of the output from the filter means with an adjustable threshold level so as to indicate temporal variations in the measurement signal due to the movement of a ferromagnetic object within an ambient magnetic field.
- 25 11. An apparatus according to any of the preceding claims wherein the primary sensor means has a first magnetic sensor comprising one of a fluxgate sensor, a magneto-resistive sensor, a magneto-impedance sensor, a hall-effect sensor, and a galvanic coil sensor.
- 30 12. An apparatus according to claim 11 wherein the primary sensor means has a second magnetic sensor comprising one of a fluxgate sensor, a magneto-resistive sensor, a magneto-impedance sensor, a hall-effect sensor, and a galvanic coil sensor.

35

- 19 -

13. An apparatus according to claim 12 wherein, at least one of the first and second magnetic sensors is separable from the signal processing means such that, in use, the at least one separable sensor may be disposed remotely to the signal processing means.

14. An apparatus according to any of the preceding claims wherein, in use, the primary sensor means are arranged to detect ferromagnetic objects in the vicinity of a magnetic resonance imaging scanner.

15. A magnetic resonance imaging scanner comprising an apparatus for detecting ferromagnetic objects according to any of the preceding claims.

16. An apparatus for detecting a ferromagnetic object substantially as herein before described with reference to figures 1-5 of the accompanying drawings.

17. A method for detecting a ferromagnetic object comprising the steps of

(i) measuring a magnetic field using primary sensor means and producing a corresponding measurement signal,

(ii) detecting the movement of objects in the vicinity of the primary sensor means using secondary, non-magnetic, sensor means,

(iii) identifying temporal variations in the measurement signal produced by the primary sensor means due to the movement of a ferromagnetic object within an ambient magnetic field,

(iv) assessing said identified temporal variations in the measurement signal in conjunction with movement of objects detected by the secondary, non-magnetic sensor means to determine a correlation there-between, and

(v) in the occurrence of a correlation, providing an indication of the presence of a ferromagnetic object.

- 20 -

Abstract**Ferromagnetic object detector**

- 5 An apparatus (2) for detecting ferromagnetic objects in the vicinity of a magnetic resonance imaging scanner. The apparatus comprises primary sensor means (4; 44) adapted to measure a magnetic field, arranged in communication with signal processing means configured to identify temporal variations in the measured magnetic field due to the movement of a ferromagnetic object within an ambient
- 10 magnetic field and to provide an output indicative of the presence of a ferromagnetic object in the vicinity of the primary sensor means (4; 44). The apparatus further comprises secondary, non-magnetic, sensor means (60) adapted to detect the movement of objects in the vicinity of the primary sensor means in order to reduce false alarms. The output from the signal processing means may be used to operate
- 15 an audible alarm (20), a visual alarm (22), an automatic door lock (26) or a physical barrier (28).

[Figure 4 should accompany the abstract]

- 1/5 -

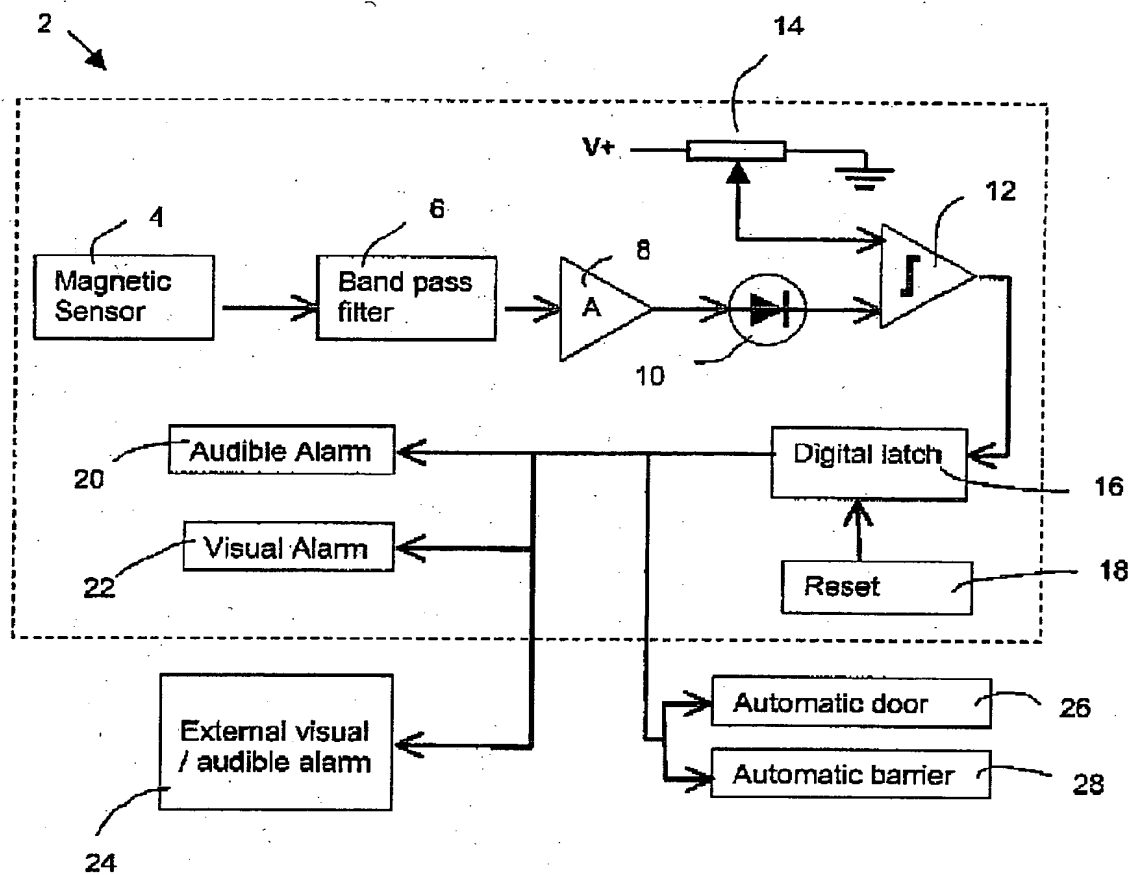


Figure 1

- 2/5 -

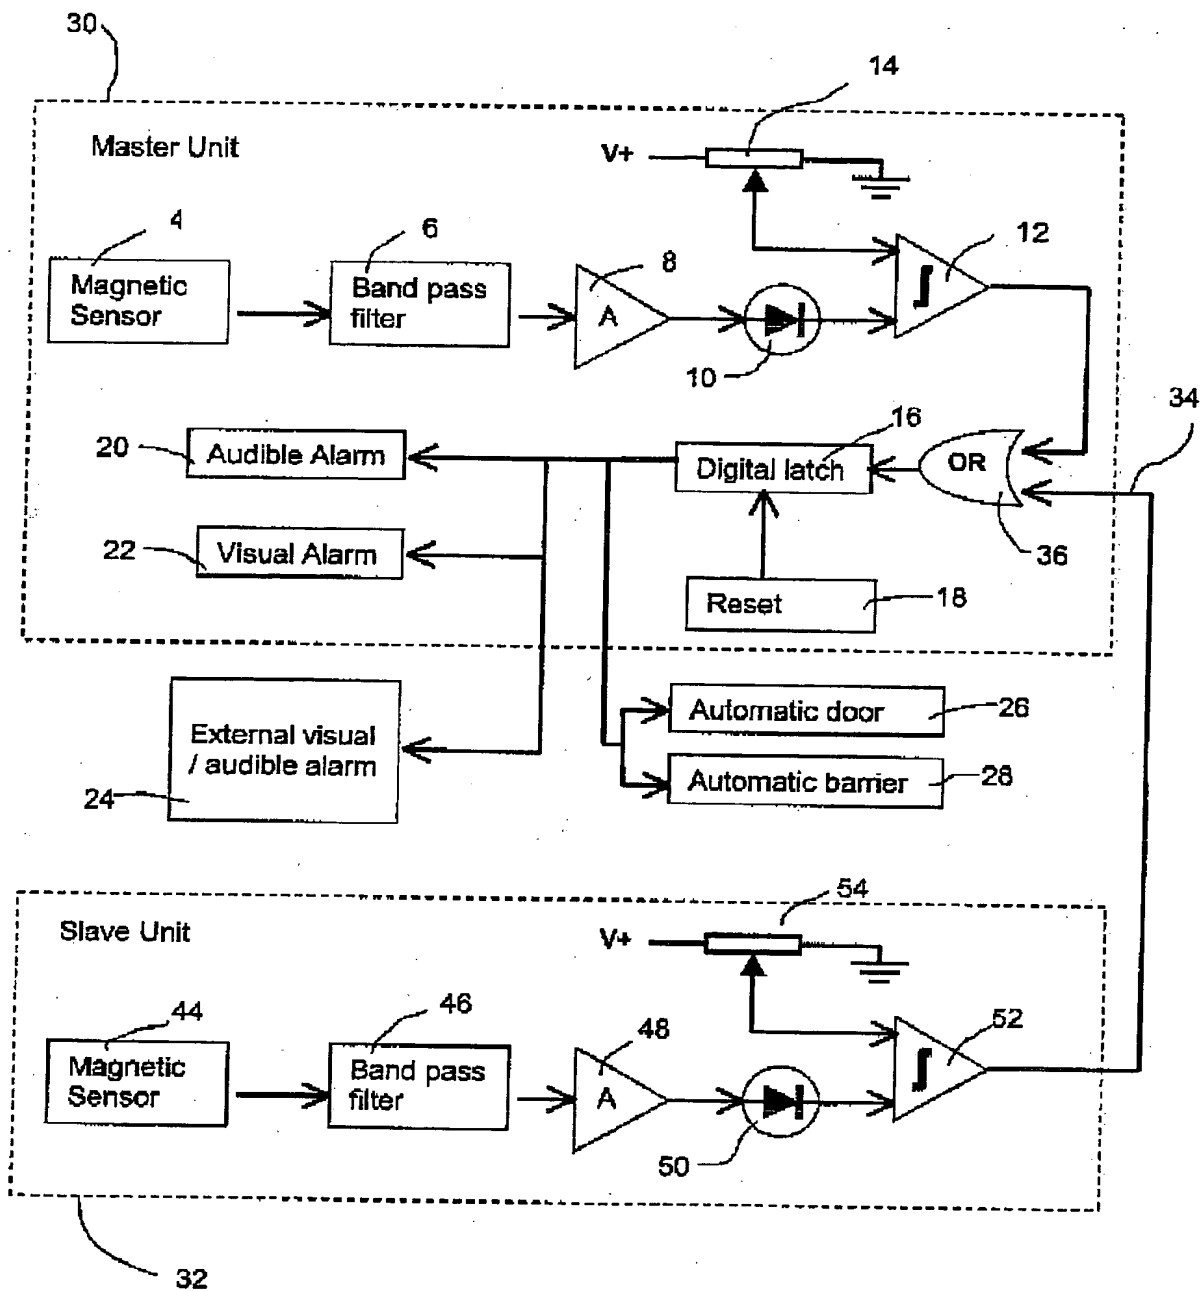


Figure 2



- 3/5 -

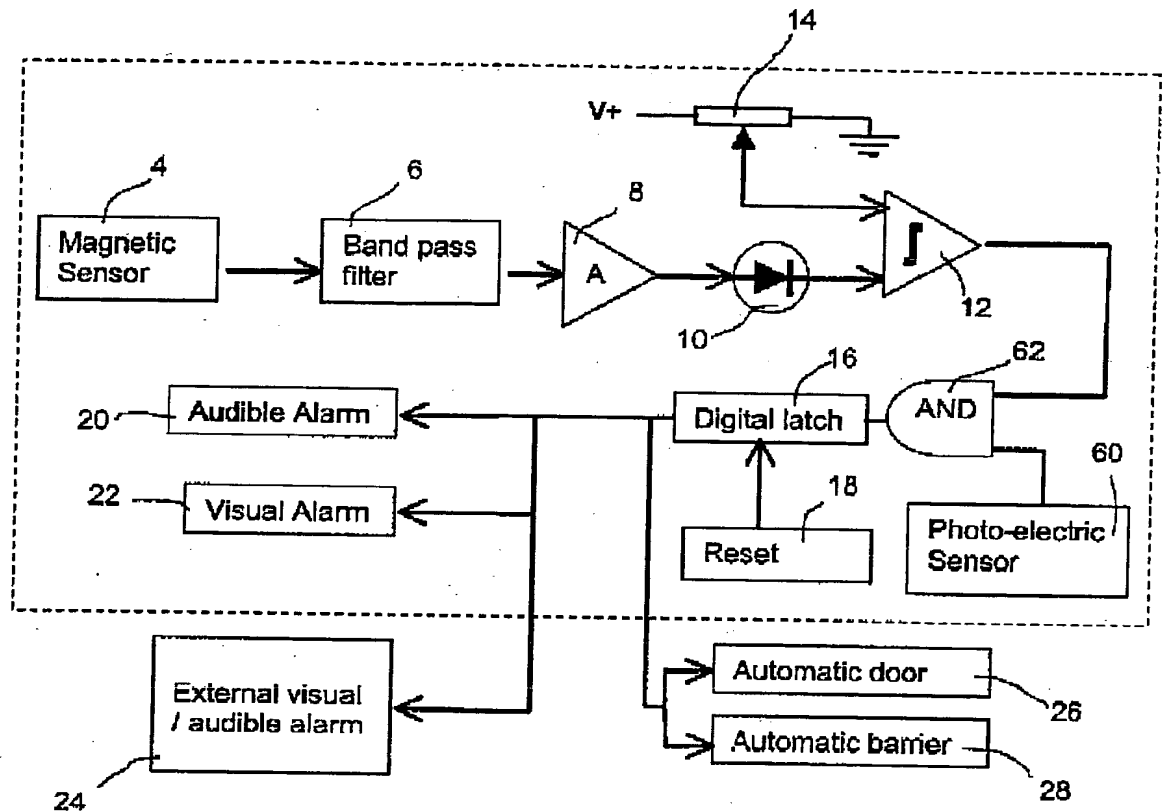


Figure 3

- 4/5 -

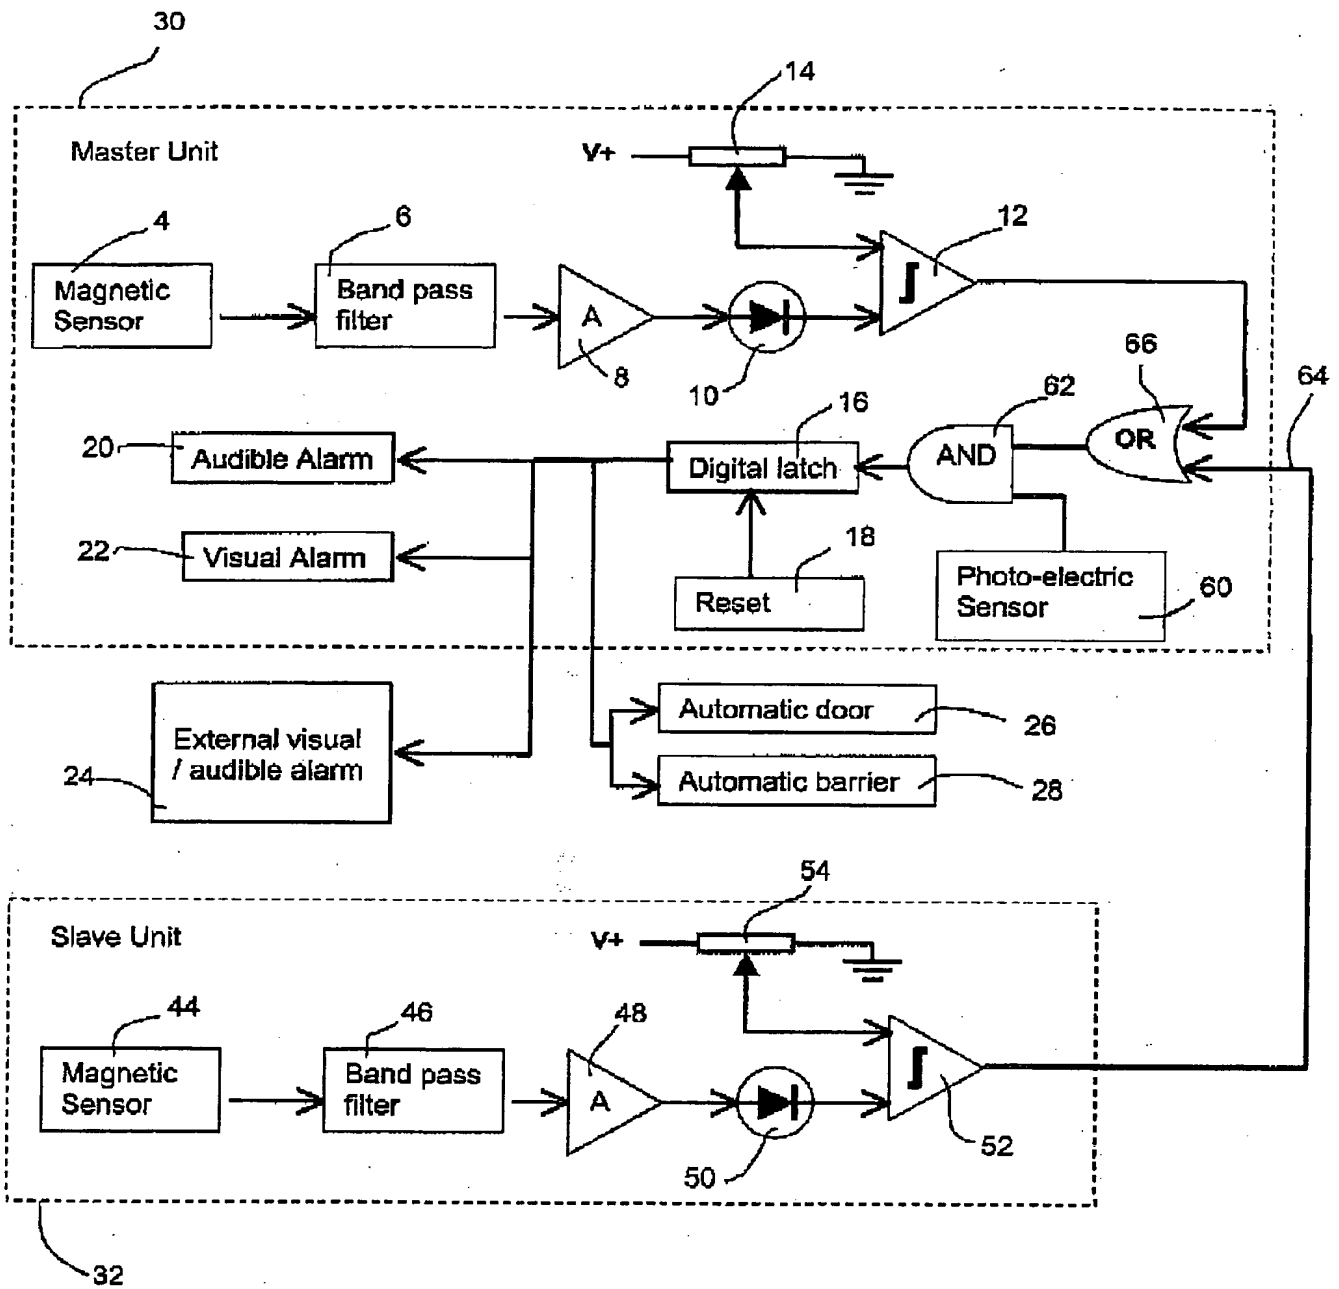


Figure 4

- 5/5 -

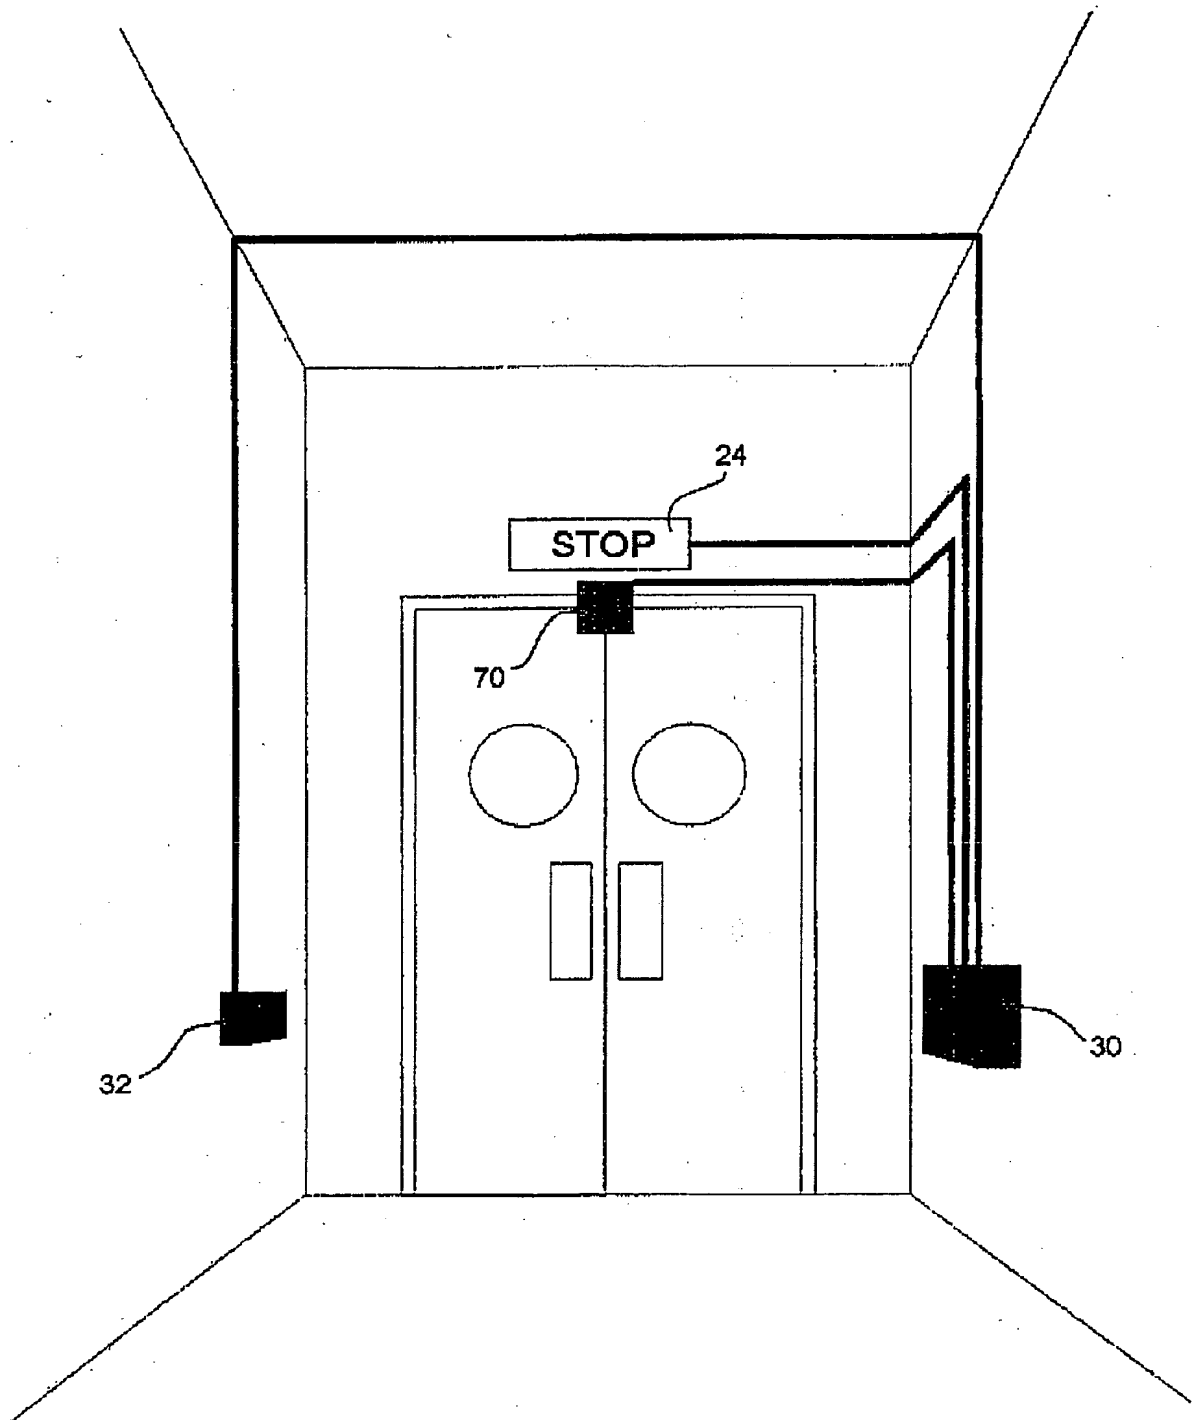


Figure 5

